


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

| REVISIONS | | | | |
|-----------|--|----------|---------|----------|
| REV | DESCRIPTION | DATE | INITIAL | APPROVED |
| A | ADDED REF. TO .630 DIM, ADDED SURFACE FINISH, ADDED BLEND SMOOTH NOTE. | 11/17/09 | RJC | RW |
| B | CH'D T/N WAS RBEA93-3410-00 IS RBE350A93-3410-00. | 6/5/14 | DJN | RJC |

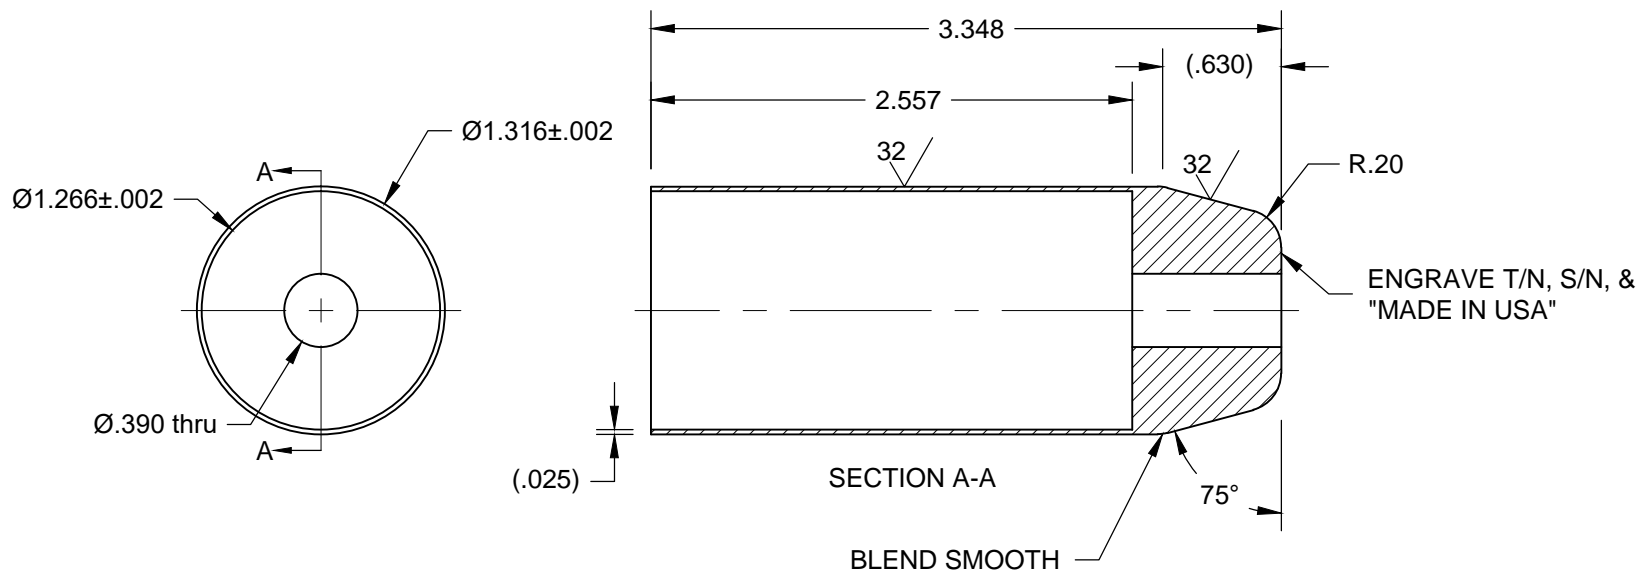

| ASSY QTY | ASSY QTY | B/O | PART # | UNIT QTY | DESCRIPTION | MATERIAL | B/O INFORMATION OR SPECIFICATIONS |
|----------|----------|-----|---------|----------|---------------------------|-------------------|--|
| | | | 3410-00 | 1 | THIMBLE | 4140 Q&T RND. BAR | Ø1-3/8 x 3-1/2 |
| | | B/O | | 1 | PUSH IN TAPERED ROUND CAP | PLASTIC | 1 in PIPE (REF. MCMaster-CARR #4491K61) PACIFIC RUBBER |
| ASSY # | | | | | | | |

| | |
|---|-----------------|
| RED BARN MACHINE | |
| TITLE SHRING THIMBLE, DRIVE SHAFT | |
| DWG NO. RBE350A93-3410-00 | REV B |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | |
| TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1 | |
| FRACTIONS ± 1/32 ANGLES ± 5° | |
| UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | |
| SCALE 1 : 1 | DATE 5-13-09 |
| SHEET 1 of 1 | |